


HollySys

00



B站扫码

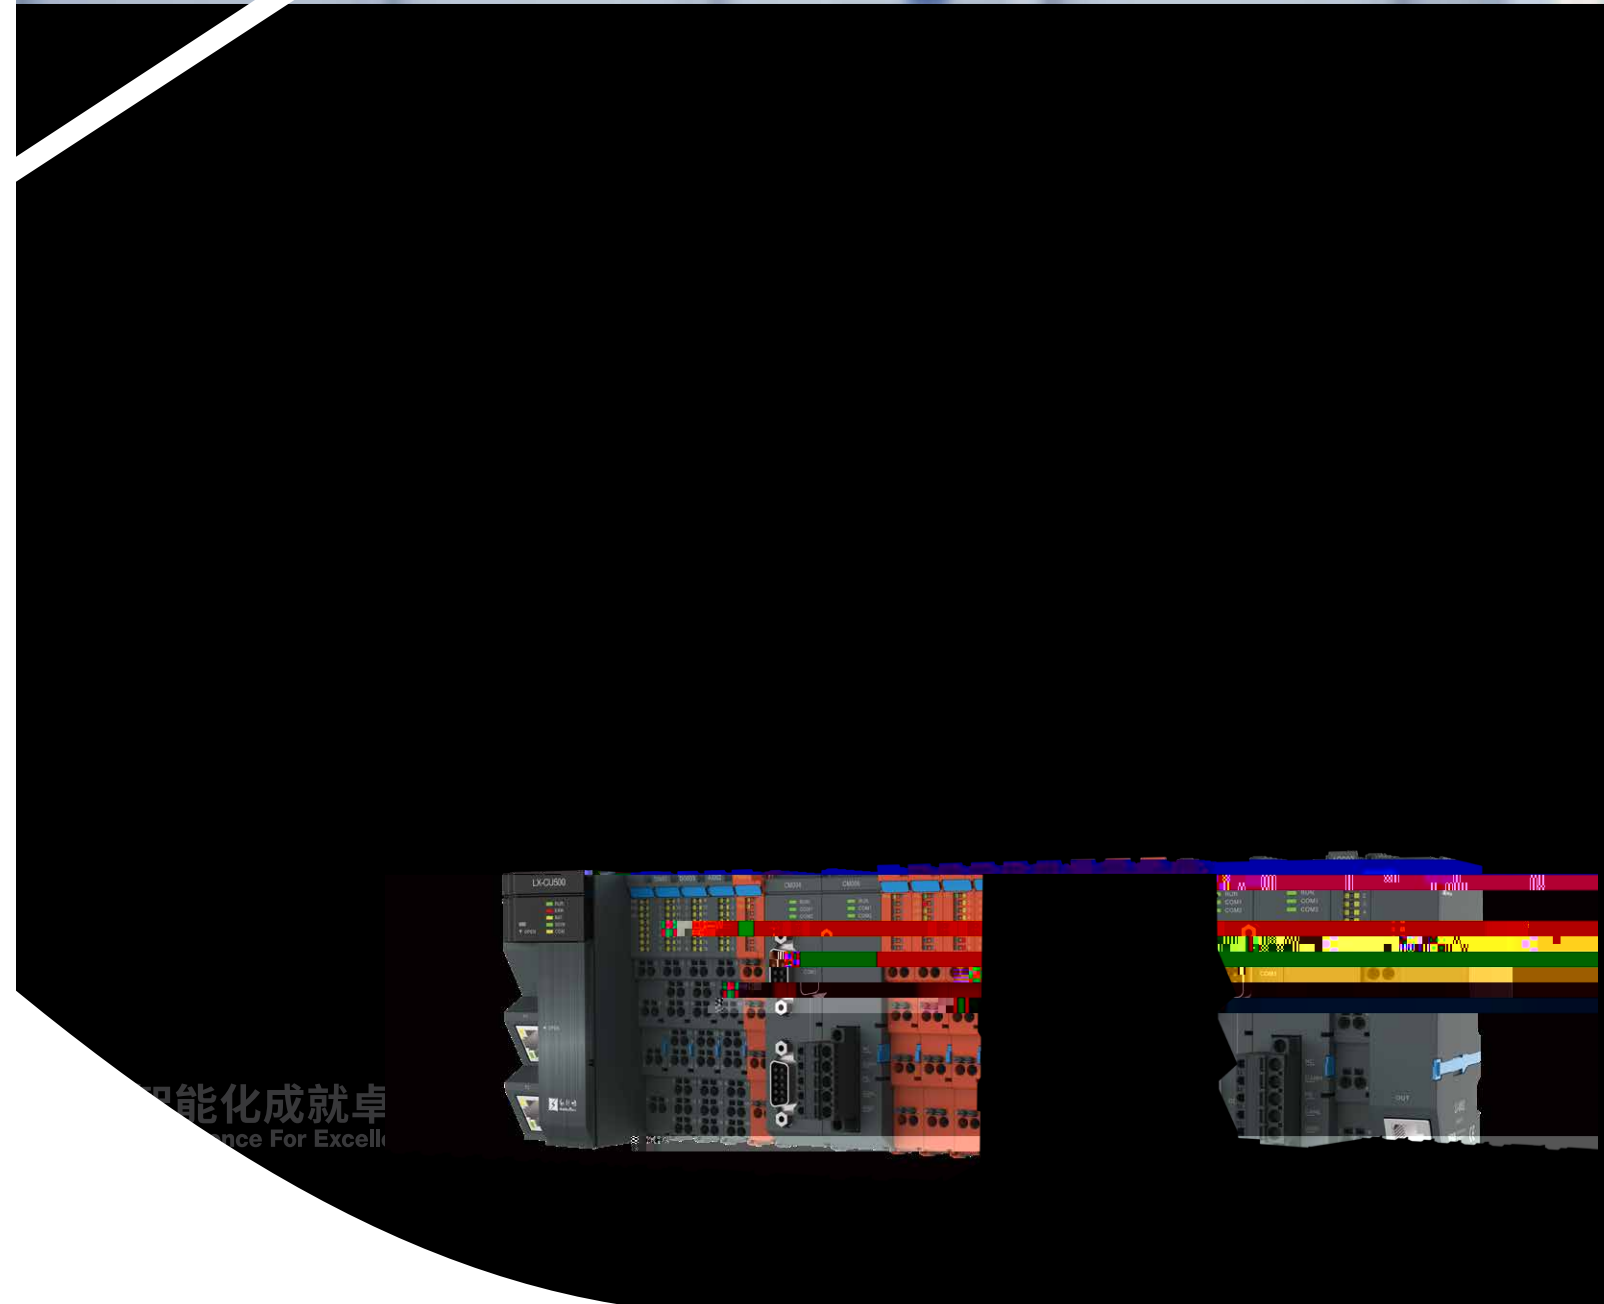

抖音扫码

地址：北京经济技术开发区地盛中路2号院
邮箱：PLC@hollysyst.com
热线：400-811-1999
版本号：202407

智能化成就卓
Excellence For Excell




1993

4700

PLC
LX
LX
LX

LX-CU500
LX

PLC

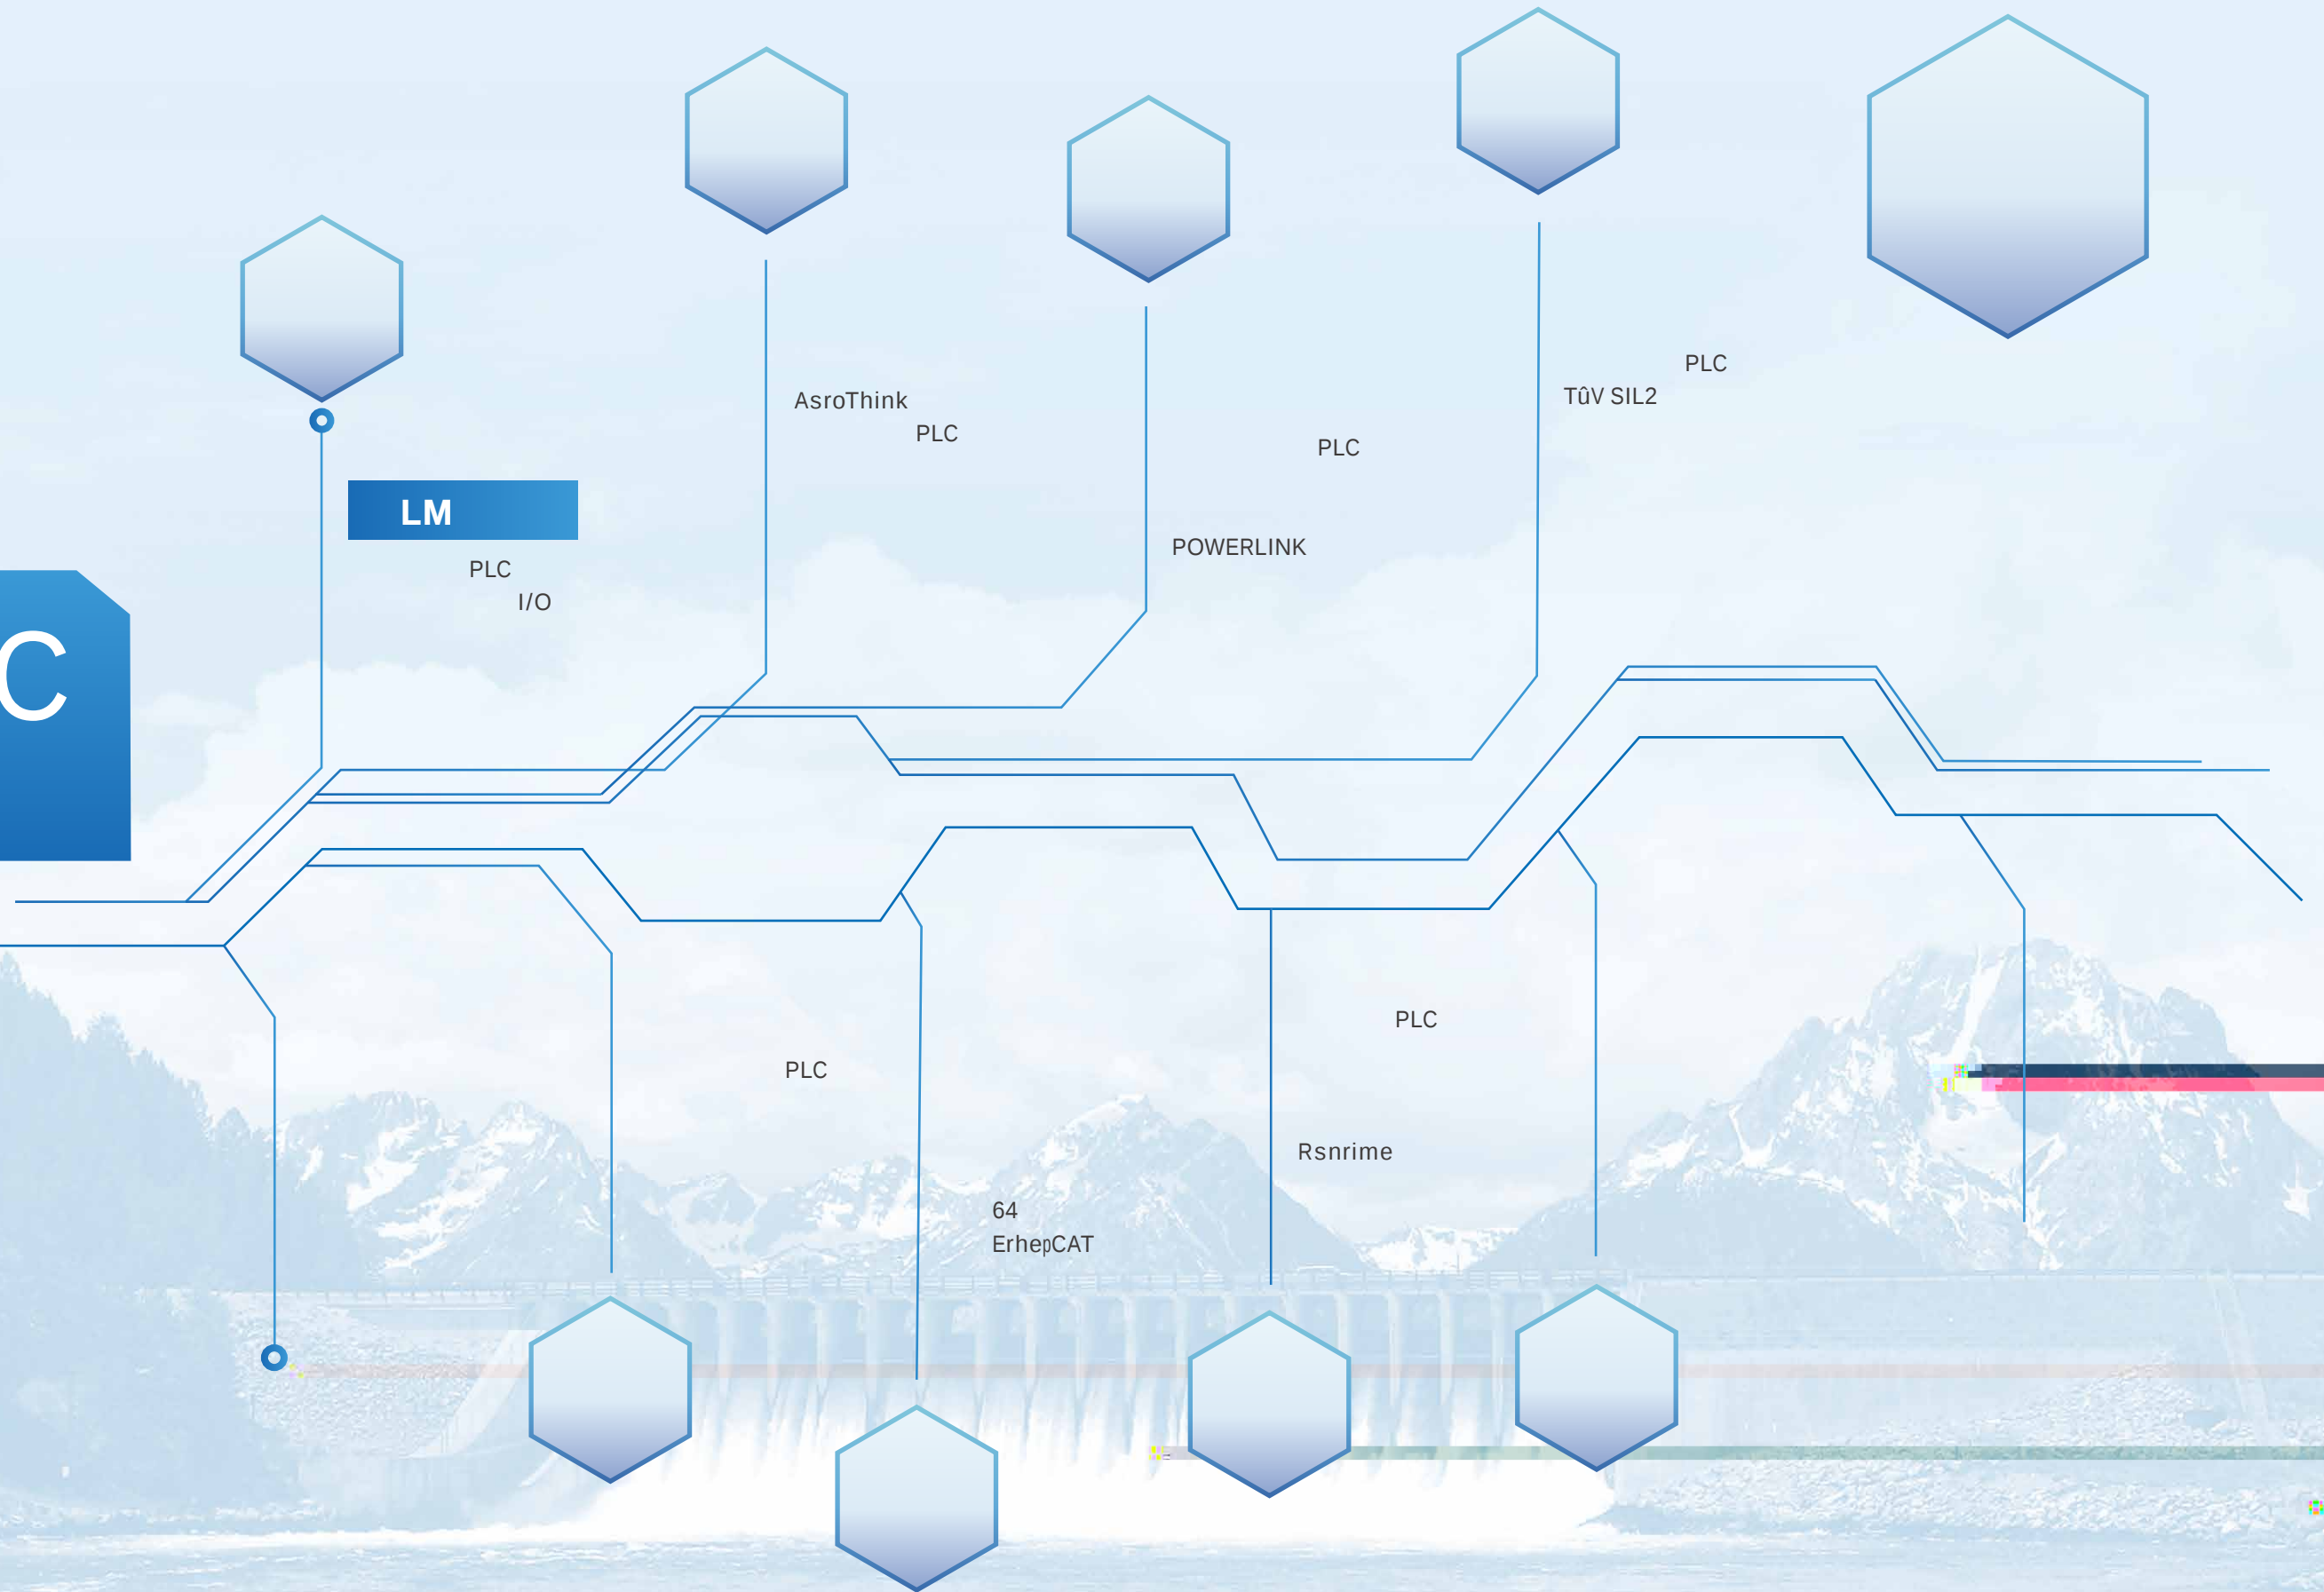


LX

LX



Product Safety
Functional
Safety

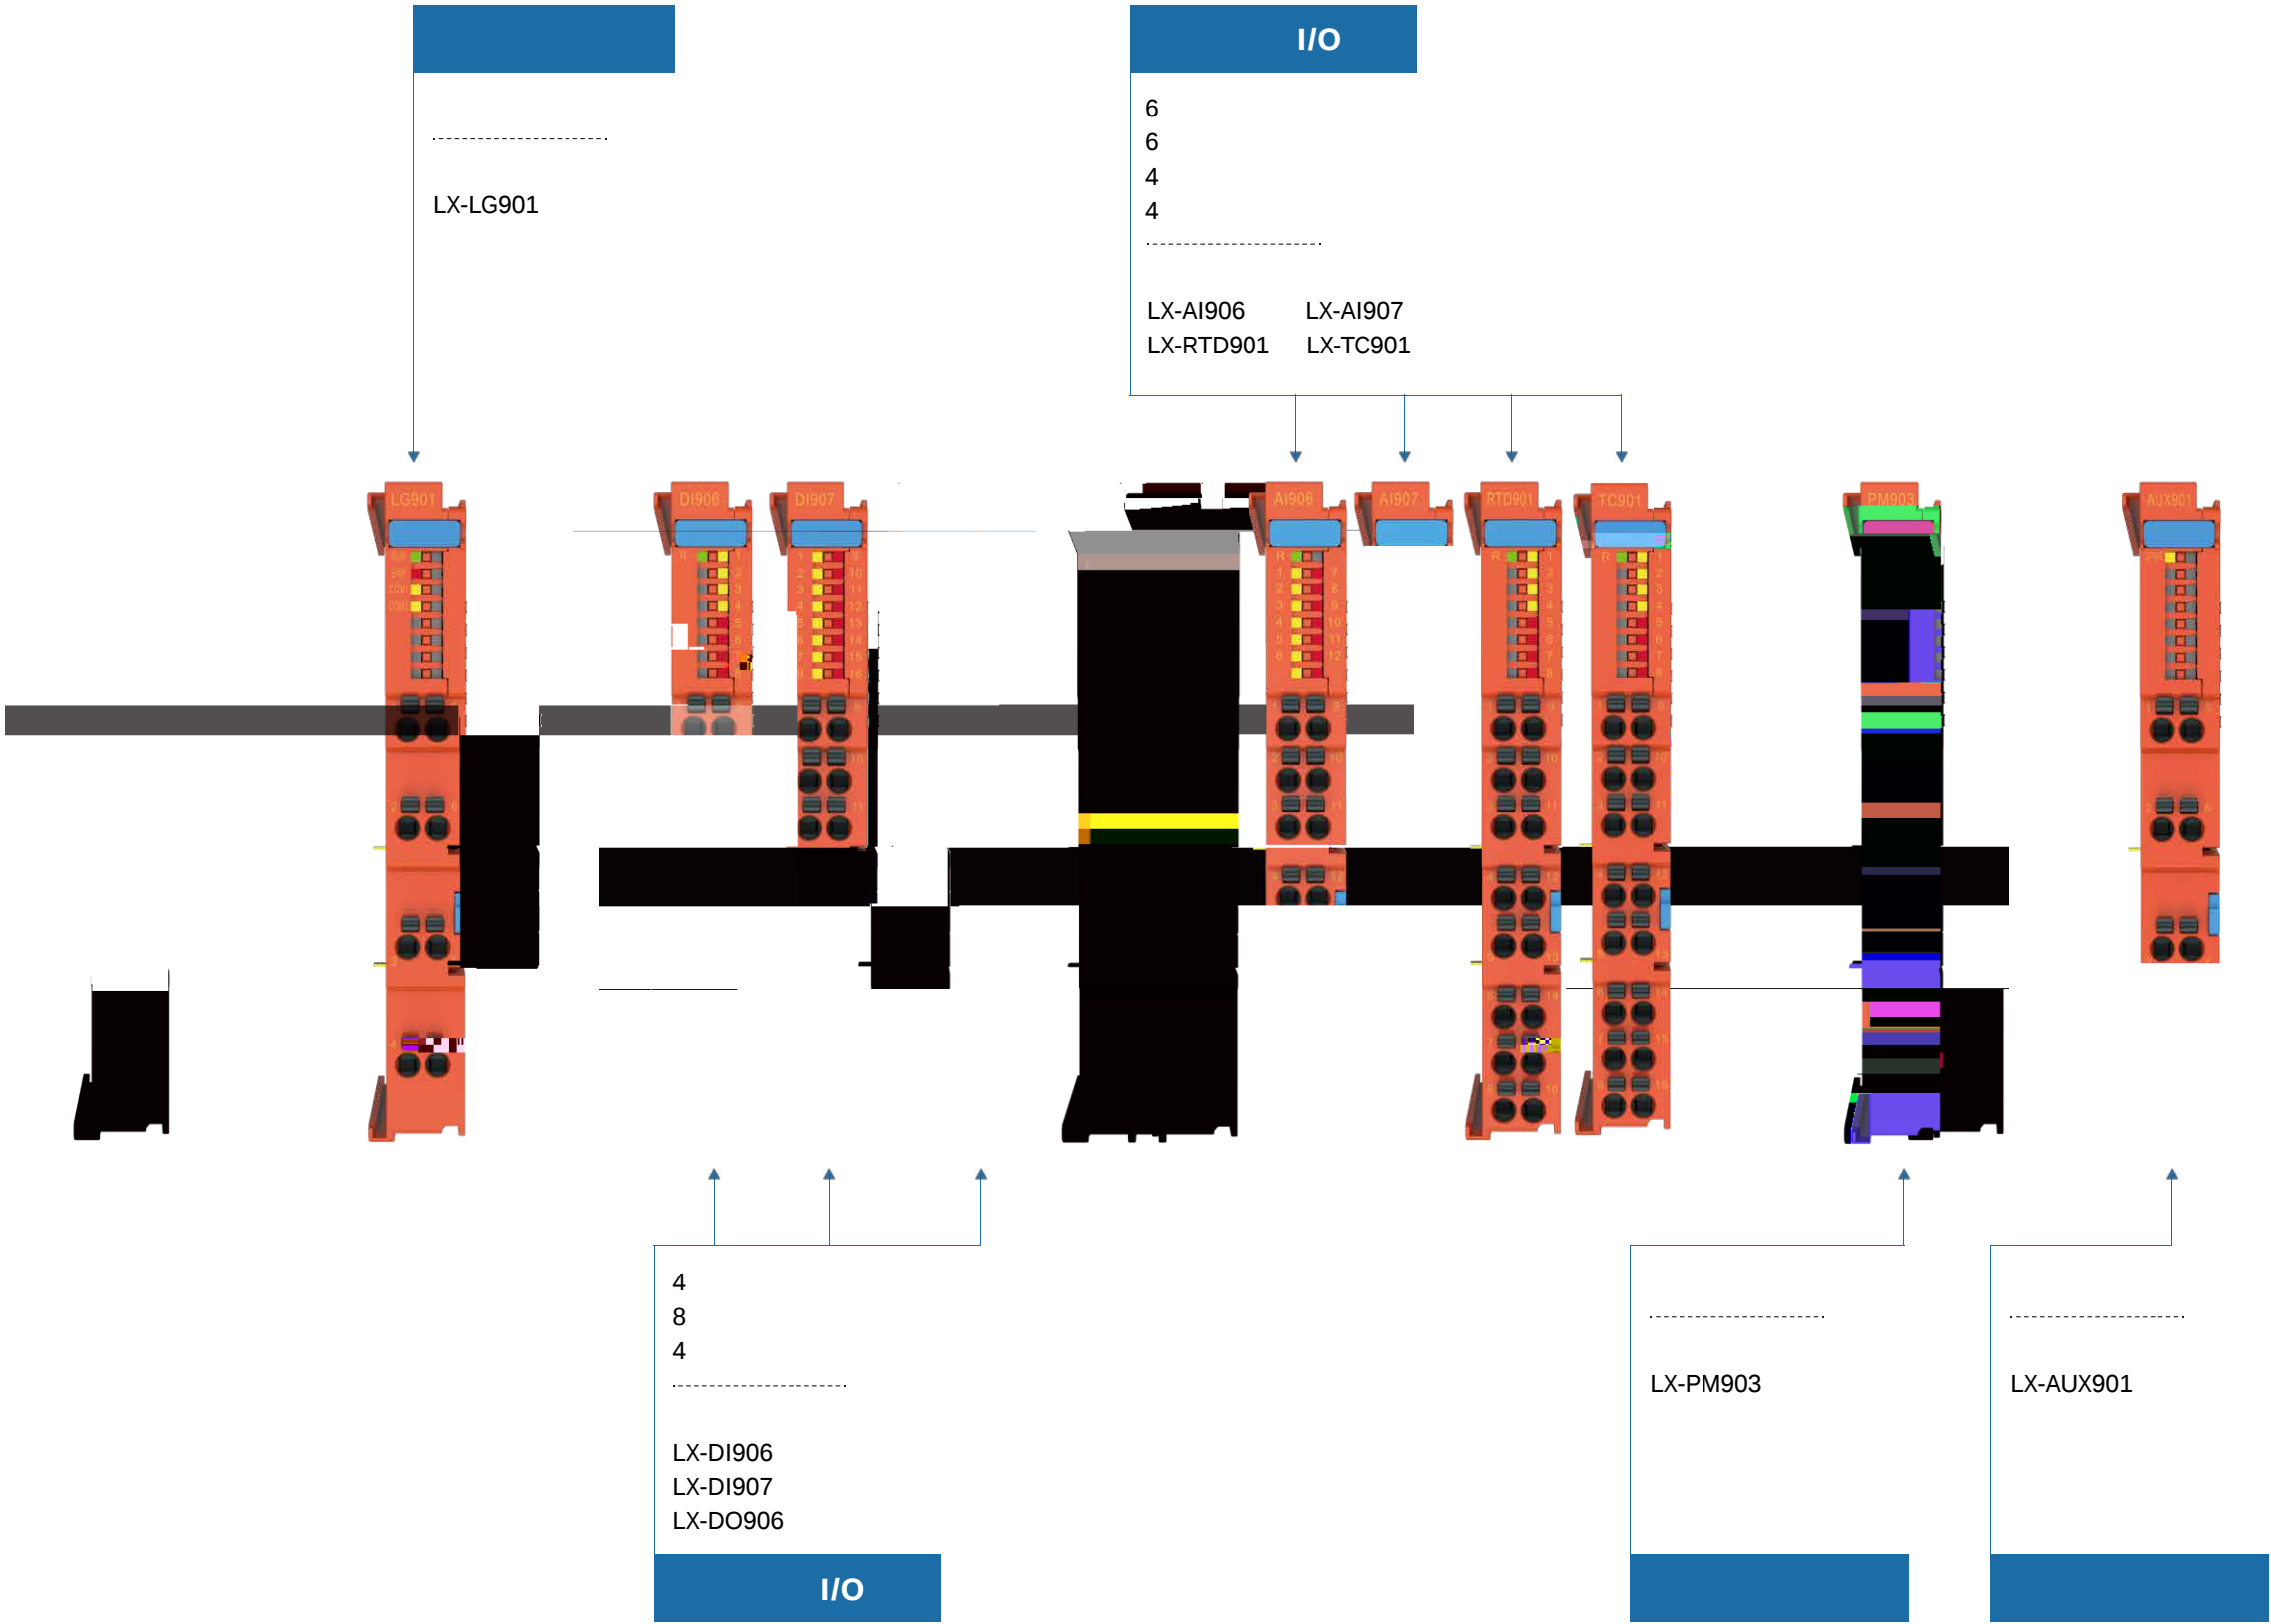

1

							W×H×D mm
			I/O				
	2	2	6DI 6DO	4MHz	LX-PO001	CE	24 × 100 × 71

2

2 SSI 2

3

									W×H×D mm
	4	4		0.1 0.01Ω	< ±0.5 °C Pt sensors, 3-wire < ±0.9°C Ni sensors < ±1 °C Pt sensors, 2-wire	1 200ms 4 500ms	LX-RTD001	CE	12 × 100 × 71
	4	4		0.01 0.001mV	mV ±0.1%F.S. B : ±8.5 /C : ±6.2 / E : ±2.5 /J : ±2.7 / K : ±3 /N : ±3 / R : ±6.7 /S : ±7.1 / T : ±2.9	4 200ms 2 100ms	LX-TC001	CE	
	4	4		0.01 0.001mV	mV : 0.05%F.S R : 1.0C/S : 1.0°C /B : 1.5°C/J : 0.5°C/ T : 0.5°C/E : 0.4C/ K : 0.4°C/N : 0.6°C/ C : 0.5C	4 200ms 2 100ms	LX-TC601	CE	

4

								W×H×D mm
	16	24V	24VDC 19.2V~28.8V	10A/	10A/	LX-AUX002	CE	12 × 100 × 71
	16	GND	0V	10A/	10A/	LX-AUX001	CE	
	16	24V	24VDC 19.2V~28.8V	10A/	10A/	LX-AUX102	CE	
	16	GND	0V	10A/	10A/	LX-AUX101	CE	

											W × H × D mm	
	8	8	0~10V	24	0.1% F.S. 25 0.3% F.S. ()		330μs/	>1MΩ	LX-AI002	CE	12 × 100 × 71	
			-10~10V									
	4	4	0~10V						LX-AI001	CE		
			-10~10V									
	4	4	0~20mA					250Ω ± 1Ω	LX-AI003	CE		
			4~20mA									

										W × H × D mm
	4	4	0~10V	16	0.1% F.S. 25 ± 0.1% F.S. ()	100μs/	<600Ω >1KΩ	LX-AO003	CE	12 × 100 × 71
			-10~10V							
			0~20mA							
			4~20mA							
	8	8	-10~10V	0.1% F.S. 25 ± 0.3% F.S. ()	250μs/	>1kΩ	LX-AO002	CE		

							W×H×D mm
		100Mbps	2	RJ45	LX-IM001	CE	40×107×84
			1	RJ45	LX-IM002	CE	20×100×69


							W×H×D mm
		24VDC 19.2V~28.8V	1.5A	10A	LX-PM003	CE	12×100×71

						W×H×D mm
	2 RS232	2		LX-CM001	CE	12×100×71
	2 RS232 DB9	2	DB9	LX-CM002	CE	24×100×71
	2 RS485	2		LX-CM003	CE	12×100×71
	2 RS485 DB9	2	DB9	LX-CM004	CE	24×100×71
	DeviceNet	1		LX-CM005	CE	24×100×69
	DeviceNet	1		LX-CM006	CE	24×100×69
	CPU	2	P1 RJ45 P2	LX-CM010	CE	56×109×90
	EtherCAT	2	RJ45	LX-CM020	CE	24×100×69
	DP	1	DB9	LX-CM009	CE	24×100×69

HUB

						W × H × D mm
HUB	6 EtherCAT HUB	1 IN 5 OUT	RJ45	LX-HUB006	CE	33 × 127 × 90
	6 EtherCAT HUB	1 IN 5 OUT IO 16	RJ45	LX-HUB106	CE	56 × 109 × 90
	6 EtherCAT HUB	1 IN 5 OUT	RJ45	LX-HUB107	CE	48 × 78 × 90

安全逻辑控制器

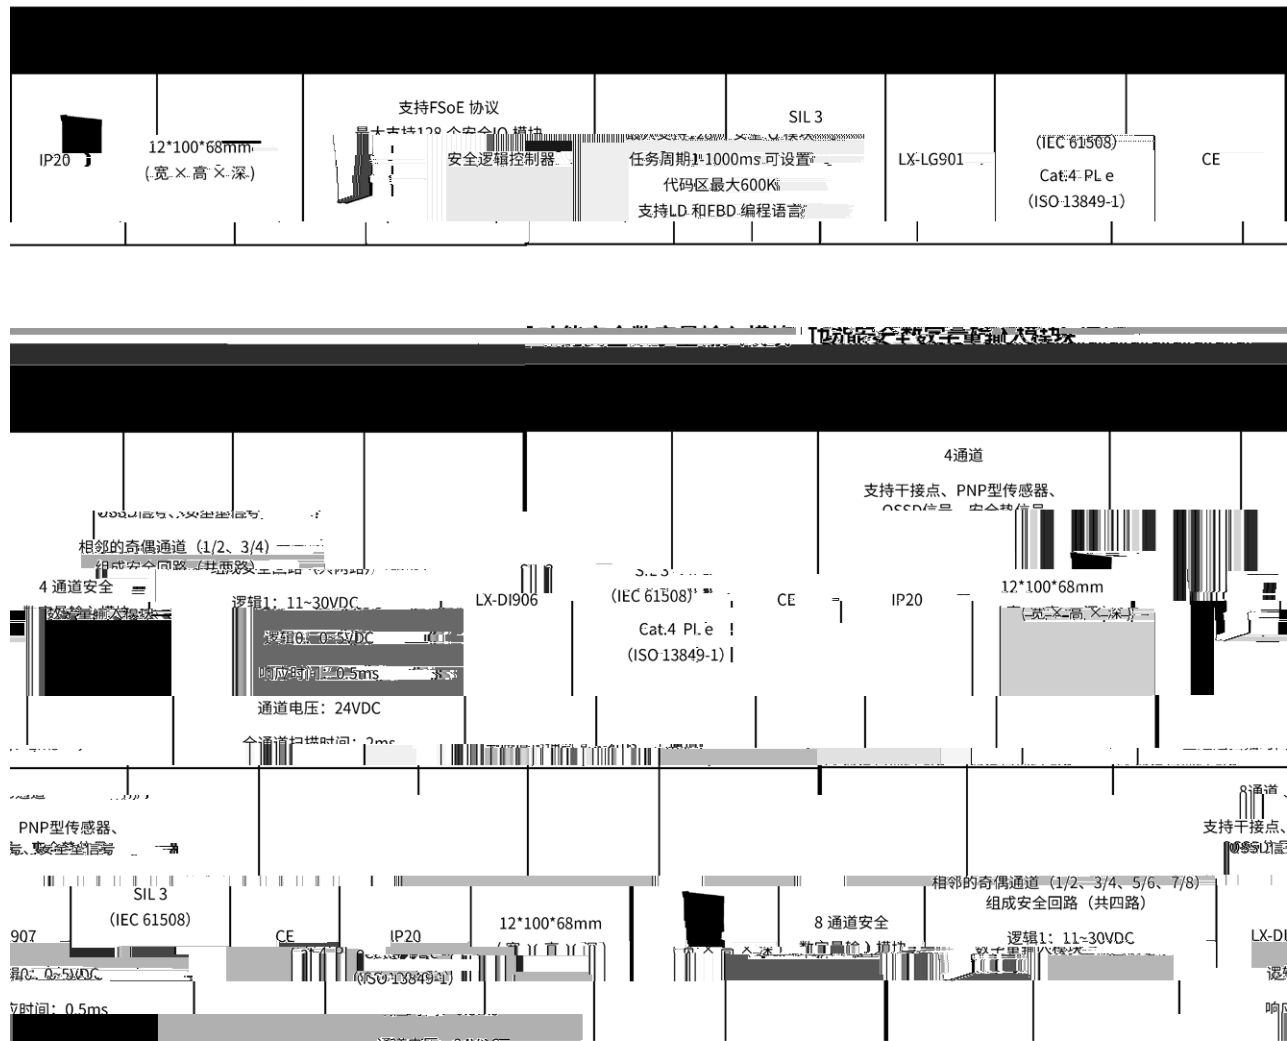

功能安全模拟量输入模块

